

jc525 U.S. PTO
09/498062
02/04/00

3. Application - 21 pages, including 2 independent claims and 24 claims total (as amended).
4. Drawings - 1 sheet of drawings containing 2 figures.

This application is being filed under the provisions of 37 C.F.R. § 1.53(f). Applicants await notification from the Patent and Trademark Office of the time set for filing the Declaration.

Applicants claim the right to priority based on European Application No. 97202433.5, filed August 5, 1997 and U.S. Provisional Application No. 60/059,986, filed September 25, 1997.

Please accord this application a serial number and filing date.

The Commissioner is hereby authorized to charge any additional filing fees due and any other fees due under 37 C.F.R. § 1.16 or § 1.17 during the pendency of this application to our Deposit Account No. 06-0916.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.

By: 
Ernest F. Chapman
Reg. No. 25,961

EFC/FPD/rgm
Enclosures

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)
Paola CARACINO et al.)
Serial No.: Unassigned) Group Art Unit: Unassigned
Filed: February 4, 2000) Examiner: Unassigned
For: HIGH TEMPERATURE)
SUPERCONDUCTING CABLE)
AND PROCESS FOR)
MANUFACTURING THE SAME)

being a **Continuation** of PCT International Application No.
PCT/EP98/04991 filed July 28, 1998

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

PRELIMINARY AMENDMENT

Before examining this application, please amend the application as follows:

IN THE SPECIFICATION:

Please amend the specification as follows:

Page 1, before line 4, insert --This application is a continuation of International
Application No. PCT/EP98/04991, filed July 28, 1998, the content of which is
incorporated herein by reference.--

LAW OFFICES

FINNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N.W.
WASHINGTON, D. C. 20005
202-408-4000

IN THE CLAIMS:

Please amend claims 1, 3-10, 18 and 20-24; cancel claims 2 and 19 without prejudice or disclaimer; and add new claims 25 and 26, as follows:

1. (Amended) A high temperature superconducting cable, comprising a tubular support, a plurality of superconducting tapes including a superconducting material enclosed in a metal covering and spirally wound onto the support so as to form at least an electroinsulated, thermally-insulated and refrigerated superconducting layer, characterized in that the superconducting tapes [have a maximum tensile deformation greater than 3%] comprise at least a metal strip coupled to the metal covering.

3. (Amended) The cable according to claim [2] 1, wherein the superconducting tapes comprise two metal strips coupled to the metal covering.

4. (Amended) The cable according to claim [2] 1, wherein the metal covering is made of silver or silver-based alloy with magnesium [and/or], aluminum [and/] or nickel or mixtures thereof.

5. (Amended) The cable according claim [2] 1, wherein the metal strip is coupled to the metal covering by welding.

6. (Amended) The cable according to claim [2] 1, wherein the metal strip is coupled to the metal covering by brazing.

7. (Amended) The cable according to claim [2] 1, wherein the metal strip is coupled to the metal covering by gluing.

8. (Amended) The cable according to claim [2] 1, wherein the strip is made of non magnetic stainless steel having a low electric conductivity.

9. (Amended) The cable according to claim [2] 1, wherein the strip is made of bronze.

10. (Amended) The cable according to claim [2] 1, wherein the strip is made of aluminium.

18. (Amended) A process for manufacturing high temperature superconducting cables, comprising the steps of:

[-] providing a tubular support,

[-] enclosing a superconductive material in a metal covering, so as to form superconductive tapes,

[-] spirally winding a plurality of superconducting tapes onto the support so as to form at least a superconducting layer,

[-] electroinsulating the superconductive layer,

[-] thermally insulating the superconductive layer,

[-] providing the possibility of refrigerating the superconductive layer below a predetermined working temperature, when cables are in use,

characterized by

[- controlling the maximum tensile deformation of the superconducting tapes to have it greater than 3%.]

coupling at least a metal strip to the metal covering of the superconducting tapes.

20. (Amended) Process according to claim [19] 18, further comprising the step of:

[- coupling two metal strips to the metal covering of the superconducting tapes.

21. (Amended) Process according to claim [19] 18, wherein the coupling step is performed by welding.

22. (Amended) Process according to claim [19] 18, wherein the coupling step is performed by brazing.

23. (Amended) Process according to claim [19] 18, wherein the coupling step is performed by glueing.

24. (Amended) Process according to claim [1] 18, wherein the tubular support is made of metal and the winding angle of the superconductive tapes on the metal tubular support is smaller than 40° .

Please add the following new claims:

--25. The cable according to claim 1, wherein the superconducting tapes have a maximum bearable tensile deformation greater than 3% during manufacturing and installation.

26. Process according to claim 18, further comprising the step of:
controlling the maximum bearable tensile deformation of the superconducting tapes during manufacturing and installation to a value greater than 3%.--

REMARKS

The claims have been amended to conform them to the Article 34 amendment filed in PCT/EP98/04991.

Claims 1, 3-18 and 20-26 are pending in this application. No new matter has been added.

Respectfully submitted,

FINNEGAN, HENDERSON, FARABOW,
GARRETT & DUNNER, L.L.P.

By: 

Ernest F. Chapman
Reg. No. 25,961

Dated: February 4, 2000

004027-2508450

LAW OFFICES

FINNEGAN, HENDERSON,
FARABOW, GARRETT,
& DUNNER, L.L.P.
1300 I STREET, N. W.
WASHINGTON, D. C. 20005
202-408-4000

High temperature superconducting cable and process for
manufacturing the same

DESCRIPTION

5 The present invention relates to a superconducting cable of the so-called high temperature type, and a manufacturing process for the same.

10 The term superconducting material, as employed throughout the description and the appended claims, refers to any material, such as for instance ceramic materials based on mixed oxides of copper, barium and yttrium or of bismuth, lead, strontium, calcium, copper, thallium and mercury, comprising a superconducting stage having an almost null resistivity at temperatures below a so-called critical temperature T_c .

15 In the field of superconductors and, accordingly, in the present description, the term high temperature refers to any temperature near to or higher than the temperature of liquid nitrogen (about 77°K), compared to the temperature of liquid helium (about 4°K), usually indicated as low
20 temperature.

High temperature superconducting cables are known for instance from DE-A-3811050 and EP-A-0747975.

25 Superconducting materials are known that have a critical temperature higher than 77°K, i.e. that show superconductivity characteristics at least up to such temperature. These materials are usually referred to as high temperature superconductors. Such materials are obviously of a greater technical interest with respect to low temperature superconductors, as their working may be
30 ensured by liquid nitrogen refrigeration at 77°K instead of liquid helium at 4°K, with much lower implementation difficulties and energy costs.

As known, in the field of electric energy transportation,

one of the problems of most difficult solution is that of rendering more and more advantageous the use of the so-called superconducting materials, from both the technological and the economic points of view.

- 5 In fact, even though these low temperature materials have been known for a long time, their diffusion was limited till now to some well defined practical applications, such as for instance the fabrication of magnets for NMR apparatuses or high field magnets for which cost is not a
10 discriminating factor.

Actually, cost savings due to less power being dissipated by superconductors is still more than counterweighted by costs due to liquid helium refrigeration, necessary to keep the latter below its critical temperature.

- 15 In order to solve the aforesaid problem, research is partly oriented towards experimenting new high temperature superconducting materials, partly tries to constantly improve both the characteristics of the existing materials and the performances of conductors incorporating already
20 available materials.

With regard to geometric characteristics, it has been found that an advantageous geometry is provided by thin tapes having generally a thickness of between 0,05 and 1 mm.

- 25 In fact, in such case the conductor comprising the very brittle superconducting ceramic material achieves on one hand an improved resistance to various bending stresses to which it is submitted during each manufacturing, shipping and installing operations of the cable containing it, and on the other hand it provides better performances with
30 regard to critical current density, because of the more advantageous orientation and compacting degree of the superconducting material.

For various reasons and in particular to improve mechanical resistance, the above conductors generally comprise a

004020-2508660

plurality of tapes, formed each by a core of superconducting material enclosed in a metal envelope - generally of silver or silver alloys - coupled together to obtain a multi-filament composite structure.

- 5 According to a widely used method, known to those skilled in the art as "powder-in-tube", this multi-filament structure of the conductor is obtained starting from small metal tubes filled with a suitable powder precursor, said tubes being in their turn enclosed in another external
- 10 metal tube or a billet, so as to obtain a compact bundle of tubes which are submitted first to several subsequent permanent deformation, extrusion and/or drawing treatments, then to rolling mill and/or pressing treatments, until the desired tape-shaped structure is obtained. See for
- 15 instance EP-A-0627773.

- Between a rolling mill treatment and the subsequent one, the tape being worked is submitted to one or more heat treatments to cause formation of the superconducting ceramic material starting from its precursor and, above
- 20 all, its syntherisation, i.e. the mutual "welding" of the granules of the powdered superconductor.

- The tapes of high temperature superconductors are rather brittle, both at the working temperature of 77°K and at room temperature, and are unsuited to stand mechanical stresses, especially tensile stresses. In fact, apart from
- 25 an actual mechanical breaking, exceeding a given tensile deformation threshold irreversibly jeopardises the superconduction characteristics of the material. Therefore, using these materials in cables is particularly
- 30 complex and delicate.

In fact, the manufacturing and installation of cables comprising such materials involves several stages which bring about unavoidably mechanical stresses.

A first critical stage is winding of several tapes on a

flexible tubular support according to a spiral arrangement, until the desired section of superconducting material is obtained. Both winding and pull cause tensile, bending and torsion deformations in tapes. The resulting stress
5 applied to the superconducting material is mainly a tensile stress. Besides, the so formed conductor (support plus superconducting material) is surrounded by heat and electric insulation means, and is submitted, during these operations, to tractions and bendings that introduce more
10 stresses in superconducting tapes.

A second critical stage concerns cable installation. The cable is indeed installed at room temperature, so as to cause additional tensile and bending stresses, and mechanical connections (locking of cable heads), electric
15 and hydraulic connections (for liquid nitrogen) are carried out at room temperature. After completing installatio, the cable is brought to its working temperature by feeding liquid nitrogen, and during such cooling each cable component is subject to mechanical stresses of thermal
20 origin, different according to the thermal expansion coefficient of the constituting material and of the characteristics of the other elements.

In particular, the differences of expansion coefficients between the support and the superconducting tape may cause
25 stresses in the latter and therefore in the superconducting material. In fact, if the superconducting material cannot shrink freely being tied to a less shrinkable support, tensile strains generate in the superconducting material. Such tensile strains add to those already present, due to
30 winding.

To reduce tensile strains, use of supports has been suggested that are made of a material having an expansion coefficient higher than that of the superconducting material (usually equal to $10 \div 20 \cdot 10^{-6}/K$), i.e. in the
35 order of at least $75 \cdot 10^{-6}/K$. Such material would not be a metal, as no metal has such values, but only a polymeric

09493002:022400

material, such as for instance teflon®, polyethylene, and derivatives thereof.

However, it has been found that the aforesaid solution, whose aim is to reduce thermomechanical stresses on tapes
5 through a suitable reduction in the support diameter, shows some important drawbacks.

In particular, the unavoidably high values of heat contraction of the conductor (support plus superconducting material) cause the formation of a wide radial hollow space
10 between the conductor itself and the surrounding insulating means (thermal and/or electric insulation). This hollow space may cause electric inconveniences, with deformation or breaking of the insulation, and/or mechanical inconveniences, namely lack of cohesion, misalignment and
15 slipping of the conductor.

Besides, poor mechanical characteristics of said polymer material do not allow to protect the superconducting material adequately during cable manufacturing and installation phases: because of the high deformability of
20 these materials any strain applied to conductors causes indeed a remarkable deformation also in the superconducting material.

Therefore, the invention relates, in a first aspect, to a high temperature superconducting cable, comprising a
25 tubular support, a plurality of superconducting tapes including a superconducting material enveloped in a metal covering (for instance, silver or a silver-based alloy with magnesium and/or aluminium and/or nickel), said tapes being spirally wound on the support, so as to form an
30 electroinsulated, thermally-insulated and refrigerated superconducting layer, characterised in that the superconducting tapes have a maximum tensile deformation greater than 3%.

The above value is to be intended as referred to the

manufacturing and installation process described above, i.e.: winding and installation at room temperature, then cooling to working temperature of about 77°K. The same applies also to the deformation values that will be given
5 in the following.

Preferably, the superconductive tapes comprise at least a metal strip (or band or laminate) connected to the metal covering.

In this way, the capability of bearing tensile stresses
10 increases. It has been observed that tensile deformation safely bearable by superconducting materials may be - at the best - of about 3%; this figure takes into account the fact that the superconducting materials already bear a compression deformation of about 1 + 1,5%, because of
15 different thermal contraction of the superconducting material with respect to the metal covering during the tape fabrication stage.

Thanks to the metal strip of the invention, not only a lower deformation under the same applied strains has been
20 observed, but especially an improved tensile deformation resistance; elongation values equal to about 5.5% have been actually reached without any damage. This effect is thought to be due to a more uniform distribution of strains in the superconducting material, that allows to better
25 exploit the mechanical characteristics of said superconducting material.

According to each individual case, only one strip coupled to the metal covering, or two strips, located at the opposite sides of the tape, can be provided.

30 Preferably, the metal strip is coupled to the metal covering by welding, brazing or gluing.

Preferably, the strip is made of non magnetic stainless steel having a low electric conductivity, or also of bronze or aluminium.

- Preferably, the tubular support of the cable is made of metal. The greater capability of bearing tensile stresses allows indeed to use a support made of metal instead of polymeric material, as will be better explained in the following.

- Various types of metals may be used for the support; in particular, for applications with very high currents, non-magnetic steel is used, preferably stainless steel. Alternatively, copper or aluminium may also be used.
- 10 The structure of the tubular support may be continuous, either smooth or corrugated. Alternatively, the tubular support may have a structure formed by a spirally wound metal tape, or may have a so-called tile-structure, i.e. with spirally connected adjacent sectors.
- 15 In a second aspect, the invention relates to a process for manufacturing high temperature superconducting cables, comprising the steps of:
- providing a tubular support,
 - enclosing a superconductive material in a metal
 - 20 covering, so as to form superconductive tapes,
 - spirally winding a plurality of superconducting tapes onto the support so as to form at least a superconducting layer,
 - electroinsulating the superconductive layer,
 - 25 - thermally insulating the superconductive layer,
 - providing the possibility of refrigerating the superconductive layer below a predetermined working temperature, when cables are in use,
 - characterised by
 - 30 - controlling the maximum tensile deformation of the superconducting tapes to have it greater than 3%.

This process allows to manufacture cables according to the first aspect of the invention.

Further characteristics and advantages of a cable and a

process according to the invention will appear more clearly from the following description of a preferred embodiment, wherein reference is made to the attached drawings. In said drawings:

- 5 Figure 1 is a schematic view of a high temperature superconducting cable according to the invention, with partly removed parts.

Figure 2 is a cross-section schematic view of a high temperature superconducting tape utilised in the cable of

- 10 Figure 1.

With reference to Figure 1, 1 indicates a one-phase superconducting cable 1 of the so-called co-axial type as a whole. Cable 1 comprises a superconducting core, globally indicated by 2, comprising at least a conducting element 3; the illustrated example relates (according to the European patent application no. 96203551.5 of the same applicant) to a cable wherein four conducting elements are provided, indicated by 3^I, 3^{II}, 3^{III}, 3^{IV}, housed - preferably loosely - within a tubular casing 9, for instance of metal, such as steel, aluminium and the like.

- 20

Each of the conducting elements 3 comprises a couple of co-axial conductors, respectively of phase 4 and of neutral 5, including each at least a layer of superconducting material.

- 25 In said example, the superconducting material is incorporated in a plurality of superposed superconducting tapes 20, spirally wound on respective tubular supports 6 and (possibly) 7, with a sufficiently low winding angle α ; if the tubular support is metal, the angle α is preferably smaller than 40°, as will be illustrated in the following.
- 30

Co-axial phase 4 and neutral 5 conductors are electrically insulated from one another by means of an interposed layer 8 of dielectric material.

Cable 1 also comprises suitable means to refrigerate the superconducting core 3 to a temperature suitably lower than the critical temperature of the chosen superconducting material, which in the cable of Figure 1 is of the so-called "high temperature" type.

The aforesaid means comprise suitable, known and thus not represented, pumping means, whose purpose is feeding a suitable refrigerating fluid, for instance liquid nitrogen at a temperature of from 65° to 90°K, both in the interior of each of the conducting elements 3, and in the interstices between such elements and the tubular casing 9.

To reduce as much as possible thermal dispersions toward environment, the superconducting core 2 is enclosed in a holding structure, or cryostat, 10 comprising a thermal insulation formed, for instance, by a plurality of superposed layers, and at least a protection sheath.

A cryostat, known in the art, is described for instance in an article by IEEE TRANSACTIONS ON POWER DELIVERY, vol. 7, no. 4, October 1992, pp. 1745-1753.

More particularly, in said example, cryostat 10 comprises a layer 11 of insulating material, constituted for instance by several tapes (some dozens) from surface-metallised plastic material (for instance polyester resin), known in the art as "thermal superinsulator", loosely wound, possibly with the aid of interposed spacers 13.

Such tapes are housed in an annular hollow space 12, delimited by a tubular element 14, in which vacuum of about 10^{-2} N/m² is maintained by means of known apparatuses.

The metal tubular element 14 is suitable to give the annular hollow space 12 the desired impermeability, and is covered by an external sheath 15, for instance of polyethylene.

Preferably, the metal tubular element 14 is formed by a

tape wound in tubular shape and longitudinally welded, made of steel, copper, aluminium and the like, or by an extruded tube or the like.

5 If required for cable flexibility, element 14 may be corrugated.

10 In addition to the described elements, cable traction elements may also be present, axially or peripherally located based on the construction and use requirements of the same, to ensure limitation of mechanical stresses applied to superconducting elements 3; such traction elements, not shown, may be constituted, according to techniques known in the art, by periferally placed metal armours, for instance by roped steel wires, or by one or more axial metal cords, or by armouring fibres of 15 dielectric material, for instance aramid fibres.

20 Preferably, the tubular supports 6 and 7 are made of non magnetic stainless steel, and may have a continuous, either smooth or corrugated, structure; alternatively, tubular supports 6 and 7 may be realised with a spirally wound steel strip or with a tile structure. Materials different from steel may also be used, such as copper or aluminium.

25 Each superconducting tape 20, as shown in Figure 2, comprises superconducting material 23, a metal covering 24 (preferably from silver or silver alloy with magnesium, aluminium or nickel), wherein the superconducting material 23 is enclosed, and at least a metal strip (or band or laminate) 25 coupled to covering 24. In particular, covering 24 has a substantially rectangular flattened section with two long sides 26 and two short sides 27; also 30 strip 25 has a substantially rectangular flattened section with two long sides 28 of a length almost equal to the long sides 26 of covering 24. Strip 25 is fastened to covering 24 by welding, brazing or gluing. It should be noted that there may be two strips 25, either equal or different, 35 fastened to opposite parts of covering 24.

EXAMPLE

To put into practice the invention, some cables have been realised having the following characteristics:

support:

5 metal or polymer

winding diameter (external diameter of the support):

40 mm

angle α :

10 - 45°

10 thickness of superconducting tape:

0.2 mm

width of superconducting tape:

4 mm

pull on individual tapes during winding:

15 10 N

working temperature:

77°K

refrigeration with locked heads (temperature jump equal to 220°K)

20 heat expansion coefficient of superconducting tape:

18,5 10^{-6}°C

heat expansion coefficient of polymer support:

80 10^{-6}°C

heat expansion coefficient of metal support:

15 10^{-6}°C

The deformation effects on the superconducting material have been taken into account, both those due to winding geometry (which depend on bending imparted to the tape and which therefore increase as angle α increases), and those due to pull during winding operation (constant), and those with locked cable heads due to the effect of thermal variation (which decrease as angle α increases, until they may become negative with a sufficiently great α). In the tables, positive figures have been used to indicate pulling deformations, negative figures to indicate compression deformations.

The tables show the feasibility either by a conventional superconducting tape with a maximum bearable tensile deformation equal to 3%, and by a superconducting tape according to the invention (provided with two strips 25 located along sides 26 of the section, having a thickness of 0.045 mm and a length of 3,8 mm, made of stainless steel, bonded to covering 24 of the strip by tin brazing), with a maximum bearable tensile deformation equal to 5.5%, therefore with a 2.5% improvement. In the latter case, the minimum increase value of tensile deformation resistance necessary to ensure feasibility has been indicated, assuming (as indicated above and practically verified) that the superconducting non-reinforced tape can bear a 3% tensile deformation. Double-underlined values indicate that the 3% limit has been exceeded.

Table 1 summarises the situation in the case of a polymeric support, table 2 that relating to the case of a metal support.

The example shows, in a specific case, that generally the invention allows a greater design freedom as concerns winding angles, support diameter, winding pull value, and, to some extent, choice of material for the support.

The possibility of using a metal for the support is particularly advantageous, as such support, besides imparting a greater solidity to the cable, therefore with a better protection for the superconducting material, above
5 all allows to prevent those drawbacks of polymeric supports mentioned above for the prior art; this means that no dangerous hollow spaces form at the working temperature between the conductor and the surrounding layers, due to differences in heat expansion coefficient. Because in the
10 cable the layers external with respect to the conductor are - as has been seen - prevailingly metal, using a metal support minimises expansion differences and therefore drastically reduces inconveniences due to hollow spaces.

Besides, the metal support lends a greater mechanical
15 resistance to the conductor, understood as the whole of the support and the superconducting material wound on the same. Hence, possible mechanical stresses on the conductor are not transmitted to a great extent to superconducting tapes (as happens with polymer supports because of their high
20 deformability), but are instead almost entirely borne by the same support.

Also the possibility of increasing the winding pull of the superconducting material is a very important advantage. In fact, compactness of the conductor winding, and therefore
25 its stability, depends on said pull.

To sum up, the invention allows to realise less delicate and more resistant superconducting cables.

Table 1 - Polymer support

Winding angle	Geometric winding deformation %	Pull deformation %	Thermal deformation %	Total deformation %	Feasibility by a conventional superconducting tape	Minimum necessary improvement %	Feasibility by an improved superconducting tape
10	0.3	0,25	<u>3,5</u>	<u>4,05</u>	NO	1,05	YES
25	1.4	0,25	0,93	2,58	YES	-	YES
28,7	1.75	0,25	0	2	YES	-	YES
45	<u>3,4</u>	0,25	-4	$(-0,35)^1$	NO	0,4	YES

¹ For a conventional superconducting tape, the mere
 5 geometric deformation at room temperature is sufficient to irreversibly damage the tape itself. Therefore, the -0,35 value is significative only for the improved superconducting tape.

Table 2 - Metal support

Winding angle	Geometric winding deformation	Pull deformation	Thermal deformation	Total deformation	Feasibility by a conventional super-conducting tape	Minimum necessary improvement	Feasibility by an improved super-conducting tape
*	‰	‰	‰	‰		‰	
10	0.3	0.25	<u>4</u>	<u>4.55</u>	NO	1.55	YES
25	1.4	0.25	<u>3.5</u>	<u>5.15</u>	NO	2.15	YES
28,7	1.75	0.25	<u>3.3</u>	<u>5.3</u>	NO	2.3	YES
45	<u>3.4</u>	0.25	<u>2.42</u>	<u>6.07</u>	NO	3.07	NO

CLAIMS

1. A high temperature superconducting cable, comprising a tubular support, a plurality of superconducting tapes including a superconducting material enclosed in a metal covering and spirally wound onto the support so as to form at least an electroinsulated, thermally-insulated and refrigerated superconducting layer, characterised in that the superconducting tapes have a maximum tensile deformation greater than 3%.
- 10 2. The cable according to claim 1, wherein the superconducting tapes comprise at least a metal strip coupled to the metal covering
3. The cable according to claim 2, wherein the superconducting tapes comprise two metal strips coupled to the metal covering.
- 15 4. The cable according to claim 2, wherein the metal covering is made of silver or silver-based alloy with magnesium and/or aluminium and/or nickel.
5. The cable according to claim 2, wherein the metal strip is coupled to the metal covering by welding.
- 20 6. The cable according to claim 2, wherein the metal strip is coupled to the metal covering by brazing.
7. The cable according to claim 2, wherein the metal strip is coupled to the metal covering by gluing.
- 25 8. The cable according to claim 2, wherein the strip is made of non magnetic stainless steel having a low electric conductivity.
9. The cable according to claim 2, wherein the strip is made of bronze.
- 30 10. The cable according to claim 2, wherein the strip is made of aluminium.

09498862-827400

11. The cable according to claim 1, wherein the tubular support is made of metal.
12. The cable according to claim 11, wherein the metal tubular support is made of non magnetic stainless steel.
- 5 13. The cable according to claim 11, wherein the metal tubular support is made of copper.
14. The cable according to claim 11, wherein the metal tubular support has a continuous structure, either smooth or corrugated.
- 10 15. The cable according to claim 11, wherein the metal tubular support has a spirally wound metal strip structure.
16. The cable according to claim 11, wherein the metal tubular support has a tile structure.
- 15 17. The cable according to claim 11, wherein the winding angle of the superconducting tapes on the metal tubular support is smaller than 40°.
18. A process for manufacturing high temperature superconducting cables, comprising the steps of:
- providing a tubular support,
 - 20 - enclosing a superconductive material in a metal covering, so as to form superconductive tapes,
 - spirally winding a plurality of superconducting tapes onto the support so as to form at least a superconducting layer,
 - 25 - electroinsulating the superconductive layer,
 - thermally insulating the superconductive layer,
 - providing the possibility of refrigerating the superconductive layer below a predetermined working temperature, when cables are in use,
 - 30 **characterised by**
 - controlling the maximum tensile deformation of the superconducting tapes to have it greater than 3%.

09498622-0021100

19. Process according to claim 18, comprising the step of:
- coupling at least a metal strip to the metal covering of the superconducting tapes.
20. Process according to claim 19, comprising the step of:
- 5 - coupling two metal strips to the metal covering of the superconducting tapes.
21. Process according to claim 19, wherein the coupling step is performed by welding.
22. Process according to claim 19, wherein the coupling
- 10 step is performed by brazing.
23. Process according to claim 19, wherein the coupling step is performed by glueing.
24. Process according to claim 1, wherein the tubular support is made of metal and the winding angle of the
- 15 superconductive tapes on the metal tubular support is smaller than 40°.

1/1

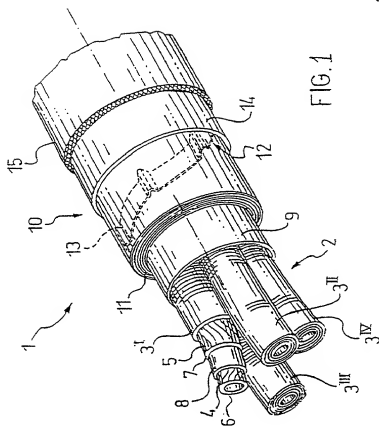


FIG. 1

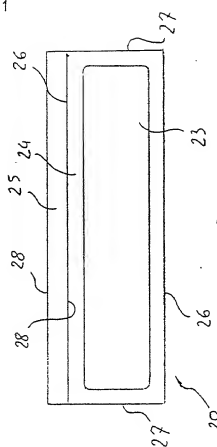


Fig-2